



# GARDEN HOSE

## AIR HOSE

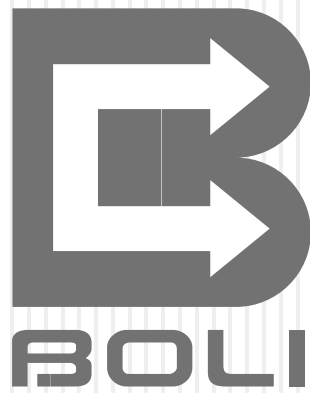


# Quality Control

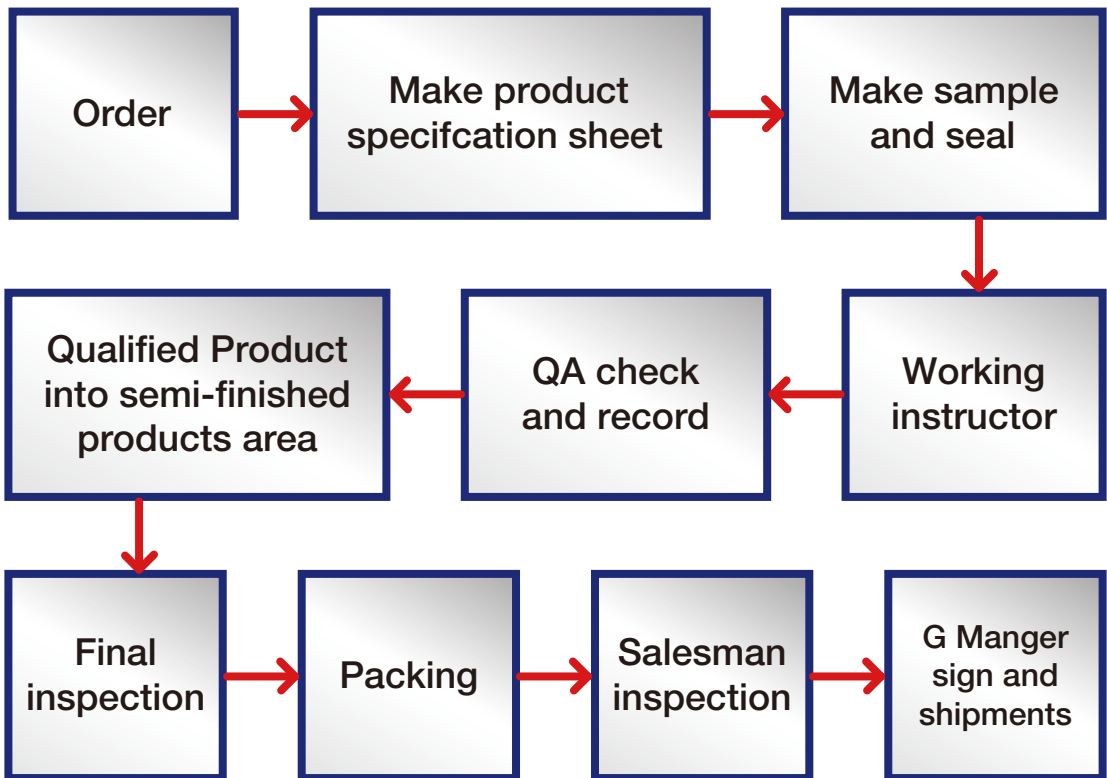

Hangzhou Boli Hardware Tools Co.,Ltd is a synthetic enterprise specialized in producing plastic hose, plastic package and louver frame, etc, as well as it also undertakes dipping plastic processing. Located at Xianghu Tourist Resort in Xiaoshan District, Hangzhou – one of the top ten counties of China, it is opposite to West Lake by Qiantang River, 30 minutes' trip to Hangzhou Railway Station and 25 minutes' trip to Hangzhou Xiaoshan International Airport. So it has charming environment and convenient traffic with superior geographic position.

Through more than 10 years of development, we keep stepping up technical renovation and into a fast lane. At present we have the domestic advanced automatic production line and testing equipment. Our garden pipe, high-pressure air pipe, plastic package and louver series products have been sold faraway to America, Europe and Oceania, etc.

By taking the enterprise spirit of “honest & credit, keep enterprising” , we are devoted to repay clients with quality products and meticulous service and high appraised by all circles of society. Our company has passed ISO9001:2000 International Quality System Certificate and ISO14001:2004 Environment Management System Certificate, which has laid solid foundation for company's growth. Facing the future, Baoli people will march forward courageously to develop market-needed products. On behalf of whole employees of Baoli Hardware Tools, we expect to make cooperation with friends in all circles of the society hand in hand to create a brilliant future together.

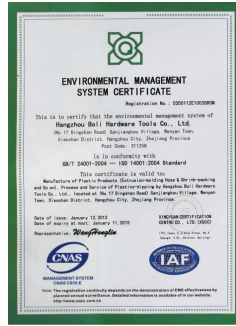



## APPLICATIONS:

Being widely used for irrigation and washing in the parks, communist, centers, factories and families. Specially suitable for hose reel.

## CHARACTERISTICS:

Being made from good quality compound Original Hybrid materials and high tensile polyester threads, this hose is Colorful, light, flexible, elastic, portable, with excellent adaptability and low coefficient of swell.

**WORKING TEMPERATURE:** -40°C—65°C

## Specification

Item NO.	size	m/roll	W.P			B.P		
			At 23°C					
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar
BLG2010	1/2	12M	7	100	7	28	400	28
BLG2011	1/2	12M	7	100	7	28	400	28
BLG2012	5/8	16M	7	100	7	28	400	28
BLG2013	5/8	16M	7	100	7	28	400	28
BLG2014	3/4	19M	7	100	7	28	400	28
BLG2015	3/4	19M	7	100	7	28	400	28
BLG2016	3/4	19M	7	100	7	28	400	28
BLG2017	1	25M	7	100	7	28	400	28





## APPLICATIONS:

Being widely used for irrigation and washing in the parks, communist, centers, factories and families. Specially suitable for hose reel.

## CHARACTERISTICS:

Being made form good quality compound PVC materials and high tensile polyester threads, this hose is Colorful, light, flexible, elastic, portable, with excellent adaptability and low coefficient of swell.

**WORKING TEMPERATURE:** -5°C—65°C

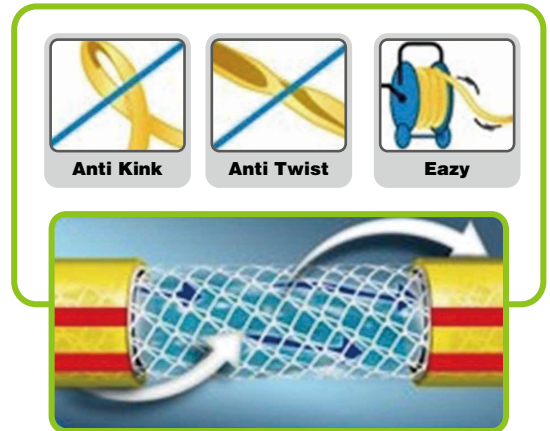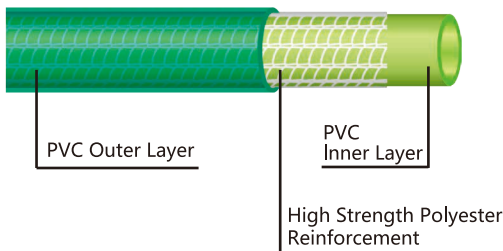


## Specification

Item NO.	size	m/roll	W.P			B.P			weight	Packing Measurement	QTY
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar			
BLG2018	1/2	11M	6	87	6	18	261	18	16	57×29×33.5	12PCS
BLG2019	1/2	12M	6	87	6	18	261	18	15	60×31×33	10PCS
BLG2020	1/2	15M	6	87	6	18	261	18	15	55.5×28.5×38	8PCS
BLG2021	1/2	18M	6	87	6	18	261	18	13	57×29×33	6PCS
BLG2022	1/2	30M	6	87	6	18	261	18	15	36×36×37	4PCS



## GARDEN HOSE WITH FITTINGS

- ※ 2× Hose End Connectors 13mm(1/2" )
- ※ 1× Tap Nut Adaptor Suits 19mm(3/4" )  
to 25mm(1" ) Taps
- ※ 1×4 Functions Spray Nozzle

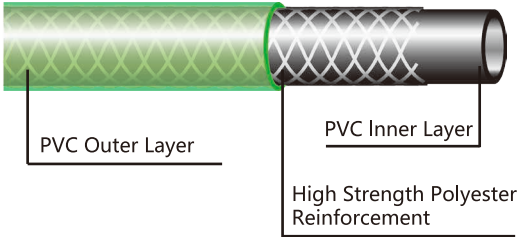

## Specification

Item NO.	size	m/roll	W.P			B.P			weight	Packing Measurement	QTY
			At 23°C								
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	G.W	L×W×H mm	
BLG2023	1/2	10M	6	87	6	18	261	18	14	60×30×37	12PCS
BLG2024	1/2	15M	6	87	6	18	261	18	16	66×33×31	10PCS
BLG2025	1/2	20M	6	87	6	18	261	18	17	68×34×38	8PCS
BLG2026	1/2	25M	6	87	6	18	261	18	16	37×37×46	6PCS
BLG2027	1/2	30M	6	87	6	18	261	18	13	38×38×37	4PCS
BLG2028	5/8	20M	5	72	5	15	217	15	18	72×36×34	6PCS
BLG2029	5/8	25M	5	72	5	15	217	15	18	36.5×36.5×56	5PCS
BLG2030	5/8	30M	5	72	5	15	217	15	13	37×37×43	3PCS
BLG2031	3/4	15M	5	72	5	15	217	15	14	39×39×46	5PCS
BLG2032	3/4	30M	5	72	5	15	217	15	22	77×39×38	4PCS

## 1/2" GARDEN HOSE WITH FITTINGS

### APPLICATIONS:

The product is used for conveying water, oil, gas under normal working condition in the factory, farm, ship, building and family, and can be matched on some exported equipments.

### CHARACTERISTICS:

It is flexible, durable, non-toxic, anti-erosion and adaptable to high pressure condition. By adding colorful symbol lines on the surface of the hose, it looks more beautiful.

**WORKING TEMPERATURE:** -5°C—65°C



- ※ 2×Hose End connectores
- ※ 1×Adjustable Nozzle
- ※ 1×Tap Nut Adaptor

## Specification

Item NO.	size	m/roll	W.P			B.P			weight	Packing Measurement	QTY
			At 23°C								
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	G.W	L×W×H mm	
BLG2033	1/2	11M	6	87	6	18	261	18	15	57×29×33.5	12PCS
BLG2034	1/2	12M	6	87	6	18	261	18	13	60×31×33	10PCS
BLG2035	1/2	15M	6	87	6	18	261	18	13	55.5×28.5×38	8PCS
BLG2036	1/2	18M	6	87	6	18	261	18	12	57×29×33	6PCS
BLG2037	1/2	30M	6	87	6	18	261	18	12	36×36×37	4PCS
BLG2038	5/8	15M	5	72	5	15	217	15	13	36×36×53	6PCS
BLG2039	5/8	20M	5	72	5	15	217	15	12	36×36×50	4PCS
BLG2040	5/8	30M	5	72	5	15	217	15	13	36×36×53	3PCS
BLG2041	3/4	15M	5	72	5	15	217	15	14	39×39×52	5PCS
BLG2042	3/4	20M	5	72	5	15	217	15	14	38×38×50	4PCS
BLG2043	3/4	25M	5	72	5	15	217	15	13	39×39×53	3PCS
BLG2044	3/4	30M	5	72	5	15	217	15	11	41×41×40	2PCS



## GARDEN HOSE WITH COLOR STRIPE

### APPLICATIONS:

Being widely used for irrigation and washing in the parks, community, factories and families.

**WORKING TEMPERATURE:** -5°C—65°C

### SPECIAL AGREEMENT:

Can make of different type of environment-friendly garden hose with the resistance to low temperature and UV.



### CHARACTERISTICS:

Colorful, light, flexible, elastic, portable and with excellent adaptability.

## Specification

Item NO.	size	m/roll	W.P			B.P			weight	Packing Measurement	QTY
			At 23°C								
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	G.W	L×W×H mm	
BLG2045	1/2	11M	6	87	6	18	261	18	13	57×29×33.5	12PCS
BLG2046	1/2	12M	6	87	6	18	261	18	12	60×31×33	10PCS
BLG2047	1/2	15M	6	87	6	18	261	18	12	55.5×28.5×38	8PCS
BLG2048	1/2	18M	6	87	6	18	261	18	11	57×29×33	6PCS
BLG2049	1/2	30M	6	87	6	18	261	18	12	36×36×37	4PCS
BLG2050	5/8	15M	5	72	5	15	217	15	13	36×36×53	6PCS
BLG2051	5/8	20M	5	72	5	15	217	15	11	36×36×50	4PCS
BLG2052	5/8	30M	5	72	5	15	217	15	13	36×36×53	3PCS
BLG2053	3/4	15M	5	72	5	15	217	15	13	39×39×52	5PCS
BLG2054	3/4	20M	5	72	5	15	217	15	14	38×38×50	4PCS
BLG2055	3/4	25M	5	72	5	15	217	15	13	39×39×53	3PCS
BLG2056	3/4	30M	5	72	5	15	217	15	11	41×41×40	2PCS





**Coil Hose With Multi-pattern Nozzle**



## United States Standard

### APPLICATIONS:

Being widely used for irrigation and washing in the parks, community, factories and families.

### CHARACTERISTICS:

Being made of good quality TPU resin, this hose is tough, elastic, non-toxic, without odor, resistant to wear, low temperature, high pressure, folding, oil and erosion. It's still very flexible and portable after being coiled.

## Specification

Item NO.	m/roll	W.P			B.P			weight	Packing Measurement	QTY
		At 23°C								
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	N.W/G.W	L×W×H mm	
BLG2057	7.5M	10	145	10	30	435	30	8/6	65×36×48	12PCS
BLG2058	15M	10	145	10	30	435	30	8/6	65×36×47	6PCS



## Specification

Item NO.	m/roll	W.P			B.P			weight	Packing Measurement	QTY
		At 23°C								
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	N.W/G.W	L×W×H mm	
BLG2059	15M	10	145	10	30	435	30	14/12	65×40×42	12PCS
BLG2060	30M	10	145	10	30	435	30	18/12	76×43×44	8PCS



## Coil Hose With Multi-pattern Nozzle

### Specification

Item NO.	m/roll	W.P			B.P			weight N.W/G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar			
BLG2061	15M	6	87	6	18	261	18	7/8	61×37×50	6PCS
BLG2062	7.5M	6	87	6	18	261	18	7.5/9.5	61×40×57	12PCS
BLG2063	15M	6	87	6	18	261	18	9/10	86×32×35	8PCS



### Specification

Item NO.	m/roll	W.P			B.P			weight N.W/G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar			
BLG2064	15M	6	87	6	18	261	18	10/12	65×40×42	12PCS
BLG2065	30M	6	87	6	18	261	18	13/15	76×43×44	8PCS

## Coil Hose With Multi-pattern Nozzle



## HOSE CONNECTOR SET

- ※ 2× Hose End Connectors 13mm(1/2" )
- ※ 1× Tap Nut Adaptor Suits 19mm(3/4" )
- ※ 1×4 Functions Spray Nozzle



## HOSE CONNECTOR SET

- ※ 2× Hose End Connectors 13mm(1/2" )
- ※ 1× Tap Nut Adaptor Suits 19mm(3/4" )
- ※ 1×4 Functions Spray Nozzle



## LAWN SPRINKLER

Mist Spray.

Suitable For a 12mm Click-on Connector.



Garden Hose Hanger



Garden Hose Seeder

## APPLICATIONS:



Being widely used as the accessory in the industry, foodstuffs making and medicine lines. Especially suitable to be the compressed air hose.

## CHARACTERISTICS:

Being made from good quality TPU resin, this hose is tough, elastic, non-toxic, without odor, resistant to wear, low temperature, high pressure, folding, oil, and erosion.

## WORKING TEMPERATURE:

-20°C—70°C

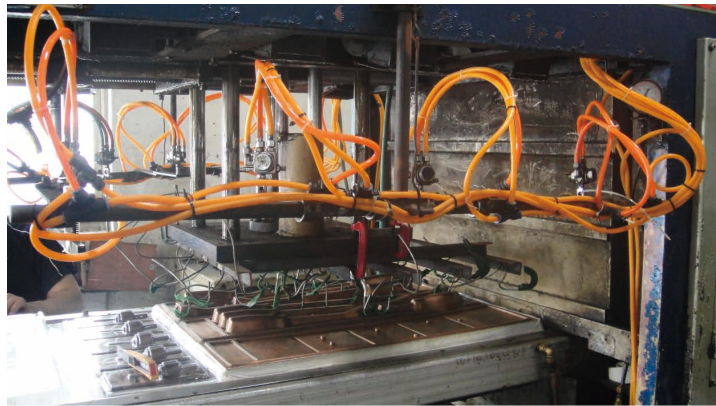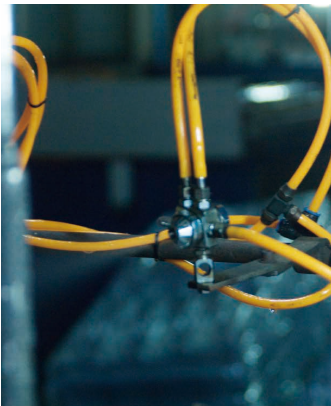

## Specification

Inch	I.D.×O.D. mm×mm	W.P			B.P			weight g/m
		kgf/cm <sup>2</sup>	psi	bar	At 23°C			
					kgf/cm <sup>2</sup>	psi	bar	
5/32	4×6	10	145	10	30	435	30	20
3/16	5.5×8	10	145	10	30	435	30	38
1/4	6.5×10	10	145	10	30	435	30	57
5/16	8×12	10	145	10	30	435	30	75
3/8	9×13	8	116	8	24	348	24	83
1/2	12×16	8	116	8	24	348	24	114







### APPLICATIONS:

Being widely used as the accessory in the industry, foodstuffs making and medicine lines. Especially suitable to be the compressed air hose.

### CHARACTERISTICS:

Being made from good quality TPU resin, this hose is tough, elastic, non-toxic, without odor, resistant to wear, low temperature, high pressure, folding, oil, and erosion.

**WORKING TEMPERATURE:** -20°C—70°C

Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight N.W/G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar			
BLA2010	5×8×20	8	116	8	24	348	24	7/8	47.5×24.5×30	10PCS
BLA2011	5×8×40	8	116	8	24	348	24	14/15	53.5×27×37	10PCS
BLA2012	5×8×60	8	116	8	24	348	24	21/22	59×30×42	10PCS



Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar			
BLA2013	4×6×200	8	116	8	24	348	24	24/26	67×33.5×50	6PCS
BLA2014	5.5×8×100	10	145	10	30	435	30	18/20	68×34.5×40	6PCS
BLA2015	6.5×10×100	10	145	10	30	435	30	21/23	72×36×34	4PCS
BLA2016	8×12×100	8	116	8	24	348	24	28/30	75×37.5×42	4PCS


## APPLICATIONS:

Being widely used as the accessory in the industry, foodstuffs making and medicine lines. Especially suitable to be the compressed air hose.

## CHARACTERISTICS:


Being made from good quality TPU resin, this hose is tough, elastic, non-toxic, without odor, resistant to wear, low temperature, high pressure, folding, oil, and erosion.

**WORKING TEMPERATURE:** -20°C—70°C

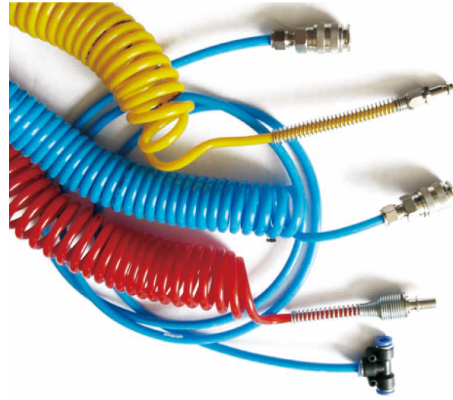

## Specification

Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar	N.W/G.W		
BLA2017	5.5×8×6	10	145	10	30	435	30	11/13	57.5×37×30	50PCS
BLA2018	5.5×8×9	10	145	10	30	435	30	16/18	53.5×31×57	50PCS
BLA2019	5.5×8×12	10	145	10	30	435	30	21/23	76×51×40.5	50PCS
BLA2020	5.5×8×15	10	145	10	30	435	30	16/18	59×48.5×38	30PCS
BLA2021	6.5×10×7.5	10	145	10	30	435	30	10.5/12.5	38×41×41	25PCS
BLA2022	6.5×10×15	10	145	10	30	435	30	21/23	70×41×41	25PCS
BLA2023	8×12×7.5	10	145	10	30	435	30	14/16	45×48×45	25PCS
BLA2024	8×12×15	10	145	10	30	435	30	28/30	85×45×45	25PCS

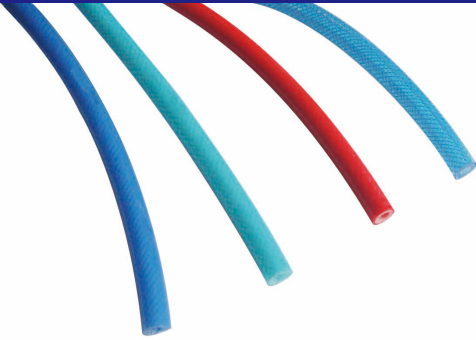

## APPLICATIONS:

Being widely used in the industry, agriculture, foodstuffs making and medicine lines. Suitable to be used under higher working pressure conditions.

## CHARACTERISTICS:

Being made from good quality TPU resin and high strength fiber thread, this hose is tough, elastic, with the resistance to wear, low temperature, high pressure, erosion and oil.

## WORKING TEMPERATURE: -20°C—70°C

Inch	I.D.×O.D. mm	W.P			B.P			weight g/m
		At 23°C						
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	
1/4	6×10	15	217	15	60	870	60	60
5/16	8×12	15	217	15	60	870	60	76
5/16	8.5×13.5	15	217	15	60	870	60	87
3/8	10×14	15	217	15	60	870	60	102
1/2	12×16	15	217	15	60	870	60	114



## Specification

Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight G.W	Packing Measurement L×W×H mm	QTY
		At 23°C								
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar			
BLA2025	8×12×10	21	300	21	82	1200	82	13	50×26×38	12PCS
BLA2026	8×12×15	21	300	21	82	1200	82	16	48×25×40	10PCS
BLA2027	6.5×10×15	21	300	21	82	1200	82	16	46×24×39.5	8PCS
BLA2028	6.5×10×30	21	300	21	82	1200	82	15	52×26.5×45	8PCS
BLA2029	6.5×10×7.5	21	300	21	82	1200	82	17	40×20.5×40.5	16PCS



## APPLICATIONS:

The hose is widely used in pneumatic tools, pneumatic washing apparatus, compressors, engine components, machine service and civil engineering equipments.


## CHARACTERISTICS:

Bing made of tough Original Hyrid materials and high tensile polyester reinforcement, this hose can work under very high working pressure. It is light, flexible, durable, anti-erosion, and explosion resistant.

**WORKING TEMPERATURE:** -40°C—65°C

## Specification

Item NO.	size	m/roll	W.P			B.P		
			At 23°C					
			kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar
BLA2030	1/4	6M	21	300	21	62	900	62
BLA2031	1/4	6M	21	300	21	62	900	62
BLA2032	1/4	6M	21	300	21	62	900	62
BLA2033	5/16	8M	21	300	21	62	900	62
BLA2034	5/16	8M	21	300	21	62	900	62
BLA2035	5/16	8M	21	300	21	62	900	62
BLA2036	3/8	9.5M	21	300	21	62	900	62
BLA2037	3/8	9.5M	21	300	21	62	900	62
BLA2038	3/8	9.5M	21	300	21	62	900	62

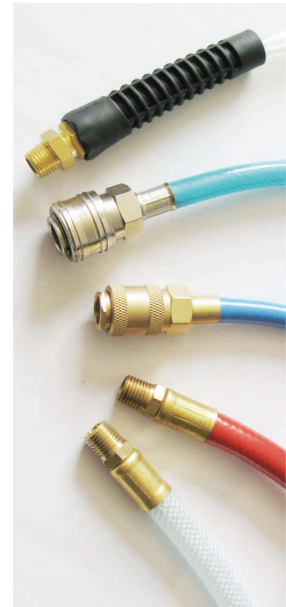







## Specification

Inch	I.D.×O.D. mm	W.P			B.P			weight g/m
		At 23°C						
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	
13/64	5×9	20	300	20	80	1200	24	59
1/4	6×10	10	145	10	30	435	30	67.5
1/4	6×11	10	145	10	30	435	30	89
1/4	6×12	10	145	10	30	435	30	113.5
5/16	8×12	10	145	10	30	435	30	85
5/16	8×13	10	145	10	30	435	30	111
5/16	8×14	10	145	10	30	435	30	139
3/8	9.5×15	9	130.5	9	27	391.5	27	92.5
3/8	9.5×14.5	9	130.5	9	27	391.5	27	120.5
1/2	12×16	7	101.5	7	21	304.5	21	118
1/2	12×17	7	101.5	7	21	304.5	21	154
1/2	12×18	9	130.5	9	27	391.5	27	190
1/2	13×17	6	87	6	18	261	18	126.5
1/2	13×18	6	87	6	18	261	18	164
1/2	13×19	8	116	8	24	348	24	202

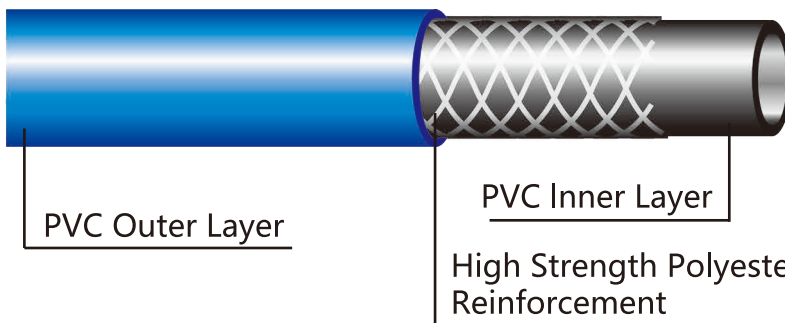

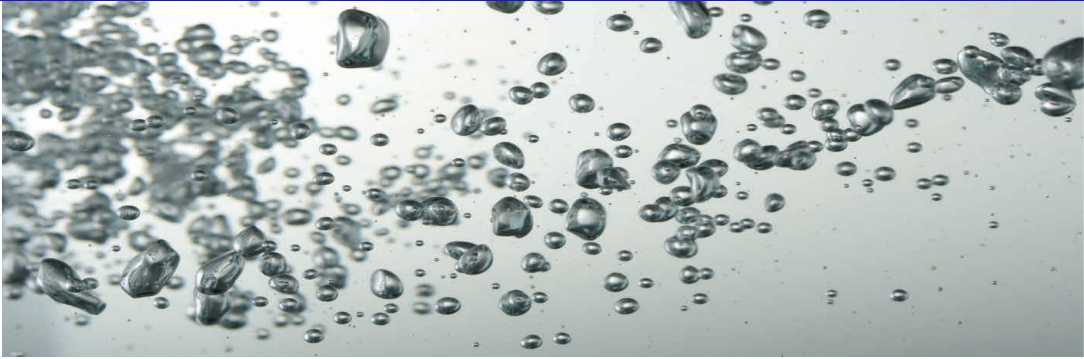


## APPLICATIONS:

The hose is widely used in pneumatic tools, pneumatic washing apparatus, compressors, engine components, machine service and civil engineering equipments.

## CHARACTERISTICS:

Being made of tough PVC materials and high tensile polyester reinforcement, this hose can work under very high working pressure. It is light, flexible, durable, anti-erosion, and explosion resistant.

**WORKING TEMPERATURE:** -5°C—65°C

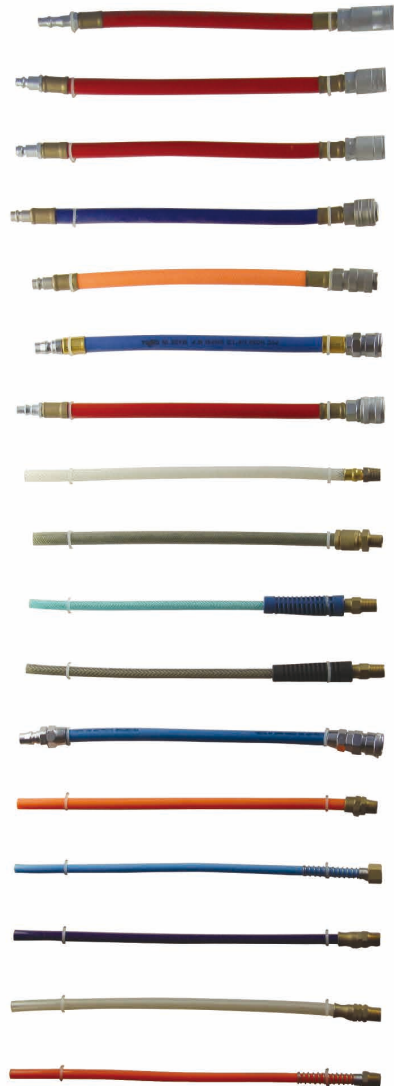



Item NO.	ID.×OD.×L mm×mm×m	W.P				B.P				Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C	kgf/cm <sup>2</sup>	psi	bar	At 23°C		
BLA2039	6×11×5	20	300	20	80	1200	80	45.5×23.5×26	12PCS		
BLA2040	6×11×15	20	300	20	80	1200	80	50.5×26×32	10PCS		
BLA2041	6×11×20	20	300	20	80	1200	80	50×26×27	6PCS		
BLA2042	6×11×30	20	300	20	80	1200	80	50×26×36.5	6PCS		



Item NO.	ID.×OD.×L mm×mm×m	W.P				B.P				Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C	kgf/cm <sup>2</sup>	psi	bar	At 23°C		
BLA2043	8×12×10	20	300	20	80	1200	80	50×26×38	12PCS		
BLA2044	8×12×15	20	300	20	80	1200	80	48×25×40	10PCS		
BLA2045	8×12×20	20	300	20	80	1200	80	48×25×40	8PCS		
BLA2046	8×12×25	20	300	20	80	1200	80	57×29×26	6PCS		
BLA2047	8×12×30	20	300	20	80	1200	80	30×30×42	4PCS		
BLA2048	8×12×50	20	300	20	80	1200	80	30×30×50	3PCS		



Item NO.	ID.×OD.×L mm×mm×m	W.P				B.P				Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C	kgf/cm <sup>2</sup>	psi	bar	At 23°C		
BLA2049	9×15×10	20	300	20	80	1200	80	58×30×33	10PCS		
BLA2050	9×15×15	20	300	20	80	1200	80	58×30×38	8PCS		
BLA2051	9×15×20	20	300	20	80	1200	80	63×31.5×45	6PCS		
BLA2052	9×15×25	20	300	20	80	1200	80	31.5×31.5×45	4PCS		
BLA2053	9×15×30	20	300	20	80	1200	80	35×35×33	3PCS		
BLA2054	9×15×50	20	300	20	80	1200	80	41×41×25	2PCS		



## AIR HOSE KIT FOR COMPRESSORS

Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight N.W/G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar			
BLA2046	9.5×15×15	20	290	20	60	870	60	15/16	32×32×33	5PCS



BLA2036

## AIR GUN SET FOR TRUCKS

WORKING PRESSURE 300 PSI/21 BAR  
BREAKING PRESSURE 1200 PSI/82 BAR



BLA2037


Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar			
BLA2055	9×15×10	21	300	21	82	1200	82	11	60×26×26.5	5PCS
BLA2056	9×15×15	21	300	21	82	1200	82	12	47×28.5×29	4PCS
BLA2057	9×15×20	21	300	21	82	1200	82	15	61×28.5×29	4PCS



BLA2038

Item NO.	I.D.×O.D.×L mm×mm×m	W.P			B.P			weight G.W	Packing Measurement L×W×H mm	QTY
		kgf/cm <sup>2</sup>	psi	bar	At 23°C					
					kgf/cm <sup>2</sup>	psi	bar			
BLA2058	5×8×5	13	188.5	13	39	565.5	39	5.5/6.5	47×39×25	5PCS



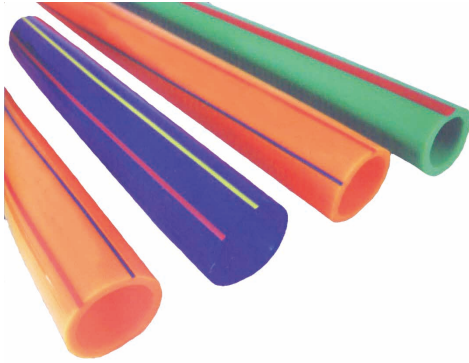

### APPLICATIONS:


The product is widely used for conveying liquid under low working pressure in agriculture, civil engineering, fishery and garden.

### CHARACTERISTICS:

Being made of high quality PVC material, it is flexible and elastic.

**WORKING TEMPERATURE:** -10°C—65°C

Inch	I.D.×O.D. mm	W.P			B.P			weight g/m
		At 23°C						
		kgf/cm <sup>2</sup>	psi	bar	kgf/cm <sup>2</sup>	psi	bar	
1/4	6×8	1.5	21.8	1.5	4.5	65.4	4.5	29
5/16	8×10	1.5	21.8	1.5	4.5	65.4	4.5	38
3/8	10×12	1.5	21.8	1.5	4.5	65.4	4.5	46
1/2	12×15	1.2	17.5	1.2	3.6	52.5	3.6	86
5/8	15×18	1.2	17.5	1.2	3.6	52.5	3.6	104
3/4	19×22	1.2	17.5	1.2	3.6	52.5	3.6	130
1	25×31	1.2	17.5	1.2	3.6	52.5	3.6	360



## QUICK CONNECTOR

Characteristics:

1. Accepts 1/4 NITTO type Plugs
2. Heavy duty, high-quality design
3. Deep knurled socket sleeve for positive gripping
4. wild use to pneumatic tools and equipment



Item No	mm*mm*mm	W. P	working temperature	Weight	packing Measurement	QTY
BOLI-004-SP/PP20	5*8	150PSI	-20°C-107°C	9.5/10.5	51*19*21	50PCS
BOLI-004-SP/PP30	6.5*10	150PSI	-20°C-107°C	10/11	51*19*21	50PCS
BOLI-004-SP/PP40	12*8	150PSI	-20°C-107°C	11/12	51*19*21	50PCS

## DUST GUN

Characteristics:

1. Strong blower ,Low energy consumption
2. Applicable to any machine and equipment clean dust.
3. The latest design USES piston structure, Durable and Stable performance



Item No	mm*mm*mm	W. P	Weight	packing Measurement	QTY
BOLI-001	Red	8KG	3/4	43*27.5*30	50PCS




Item No	mm*mm*mm	W. P	Weight	packing Measurement	QTY
BOLI-002	Black	8KG	5.5/6.5	53.5*28.5*30.5	50PCS



Item No	mm*mm*mm	W. P	Weight	packing Measurement	QTY
BOLI-002	Blue	8KG	5.5/6.5	53.5*28.5*30.5	50PCS



Item No	mm*mm*mm	W. P	Weight	packing Measurement	QTY
BOLI-003	DG-10	8KG	5.5/6.5	47*21.5*25.5	50PCS

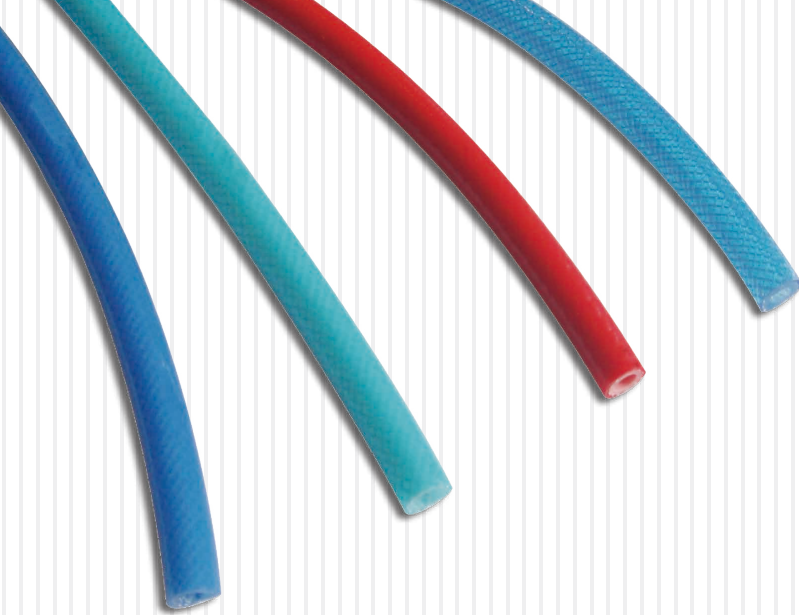

## **MARKTOP TOOLS DEVELOPMENT LTD.**

4th floor, hydrology archives building,  
370 North Shaoshan Road,  
Changsha 410007 Hunan, China  
Tel: +86-731 85506690  
Fax: +86-731 85506612  
Email: [sally.fu@marktop.com](mailto:sally.fu@marktop.com)